

CONDENSER - Performance

Heat Exchanger : B200THx100/1P

Fluid Side 1 : R507A
 Fluid Side 2 : Water

Side 1 : Inner circuit
 Side 2 : Outer circuit

Flow Type : Counter-Current
 SSP Alias : B200T

DUTY REQUIREMENTS

		Side 1	Side 2
Heat load	kW	160,0	
Inlet temperature	°C	70,00	30,00
Condensation temperature (dew)	°C	40,24	
Subcooling	K	3,00	
Outlet temperature	°C	37,21	35,00
Flow rate	kg/s	1,012	7,658
Fluid condensed	kg/s	1,012	

PLATE HEAT EXCHANGER

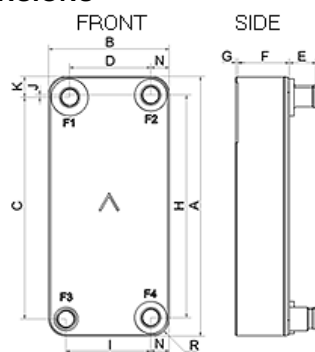
		Side 1	Side 2
Total heat transfer area	m²	12,6	
Heat flux	kW/m²	12,7	
Mean temperature difference	K	7,66	
O.H.T.C. (available/required)	W/m², °C	1650/1650	
Pressure drop -total*	kPa	2,08	37,7
- in ports	kPa	-0,0249	5,80
Operating pressure - outlet	kPa	1880	
Number of channels per pass		49	50
Number of plates		100	
Oversurfacing	%	0	
Fouling factor	m², °C/kW	0,000	
Port diameter	mm	60,0/42,0 (up/down)	53,0/53,0 (up/down)
Recommended inlet connection diameter	mm	From 22,7 to 50,7	
Recommended outlet connection diameter	mm	From 25,8 to 51,6	
Reynolds number			1699
Inlet port velocity	m/s	3,57	3,49

PHYSICAL PROPERTIES

		Side 1	Side 2
Reference temperature	°C	40,23	32,50
Liquid - Dynamic viscosity	cP	0,0997	0,757
- Density	kg/m³	966,9	994,9
- Heat capacity	kJ/kg, °C	1,696	4,178
- Thermal conductivity	W/m, °C	0,05988	0,6194
Vapor - Dynamic viscosity	cP	0,0127	
- Density	kg/m³	100,2	
- Heat capacity	kJ/kg, °C	1,303	
- Thermal conductivity	W/m, °C	0,01578	
- Latent heat	kJ/kg	116,3	
Film coefficient	W/m², °C	2330	13000
Minimum wall temperature	°C	30,64	30,52
Maximum wall temperature	°C	35,75	35,61
Largest wall temperature difference	K		0,27
Channel velocity	m/s	0,432	0,323
Shear stress	Pa		69,9

TOTALS

Total weight	kg	49,5 - 60,6
Hold-up volume, inner circuit	dm³	11,8
Estimated refrigerant charge	kg	4,05
Hold-up volume, outer circuit	dm³	12,1
Port size F1/P1	mm	60,0
Port size F2/P2	mm	53,0
Port size F3/P3	mm	42,0
Port size F4/P4	mm	53,0
NND F1/P1	mm	65,0
NND F2/P2	mm	58,0
NND F3/P3	mm	42,0
NND F4/P4	mm	58,0
Carbon footprint	kg	348

DIMENSIONS


This is a schematic sketch. For correct drawings please use the order drawing function or contact your SWEP representative.

A	mm	525 +/-2
B	mm	243 +/-1
C	mm	448,50 +/-1
D	mm	163,50 +/-1
E	mm	54 (opt. 27) +/-1
F	mm	239,00 to 251,00 +2%/-1,5%
G	mm	0,0 to 4 +/-1
H	mm	450 +/-1
I	mm	171 +/-1
J	mm	4,50
K	mm	42
N	mm	37,50
R	mm	35

Disclaimer: Data used in this calculation is subject to change without notice. SWEP strives to use "best practice" for the calculations leading to the above results. Calculation is intended to show thermal and hydraulic performance, no consideration has been taken to mechanical strength of the product. Product restrictions - such as pressure, temperatures and corrosion resistance- can be found in SWEP product sheets and other technical documentation. SWEP may have patents, trademarks, copyrights or other intellectual property rights covering subject matter in this document. Except as expressly provided in any written license agreement from SWEP, the furnishing of this document does not give you any license to these patents, trademarks, copyrights, or other intellectual property. To the maximum extent permitted by applicable law, the software, the calculations and the results are provided without warranties of any kind, whether express or implied. No advice or information obtained through use of the software (including information provided in the results), will create any warranty not expressly stated in the applicable license terms. Without limiting the foregoing, SWEP does not warrant that the content (including the calculations and the results) is accurate, reliable or correct. SWEP does not warrant that any system comprising heat exchanger and other components, installed on the basis of calculations in this software, will meet your requirements or function to your satisfaction or expectations.

*Excluding pressure drop in connections.



H54J337PCZULS5XM47K3XDOWCOQRNEYW7L5ALY